



CS CO.,LTD.

31-102, JUNAM MAEUL 2-GIL, YANGSAN, GYEONGSANGNAM-DO, KOREA

TEL : 82-51-831-2171

FAX : 82-51-831-2174

Cert No. : F090-24001-05

Date : Apr.25,2024

MILL TEST CERTIFICATE

Customer : KAPTAN CELIK HALAT SAN.VE TIC. A.S

L/C No. : _____ Order No. : CSP24-0181

Commodity : GALVANIZED STEEL WIRE ROPE


Construction : 19x7 Grade : 1960

Specification : EN12385-4 Lubrication : A1

Diameter : 20.00 MM Reel No. : 1-3

Quantity : 3 Reels Length : 1,500 M

Kind of Lay : RHOL Weight : _____

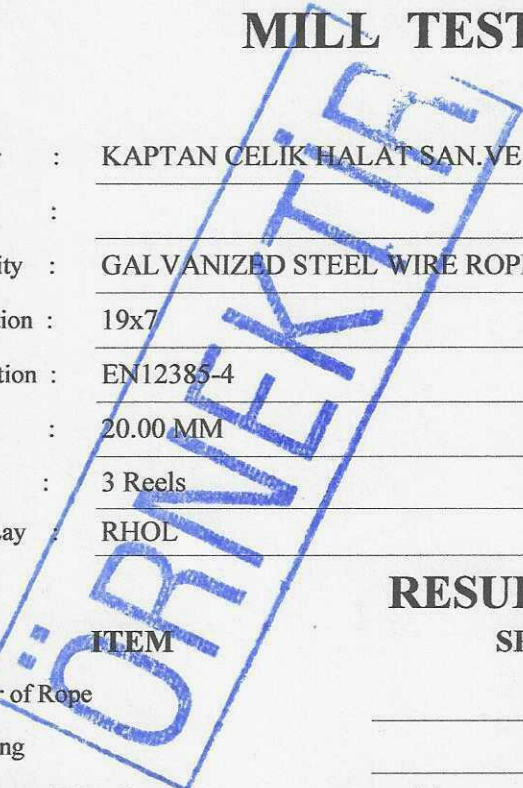

RESULT OF TEST

ITEM	SPECIFICATION			ACTUAL	
	Diameter of Rope	20.00 ~ 21.00	mm	20.32	mm
Preforming	GOOD		GOOD		
Length Lay of Wire Rope	Max.	- mm	120.0	mm	
Breaking Strength of Wire Rope	Min.	257 kN	317	kN	
Nominal Diameter of Outer Wire			1.32	mm	
Tensile Strength of Wire		1960 N/mm ²	2155	N/mm ²	
Number of Torsion of Wire	Min.	22 Turns	30	Turns	
Weight of Zinc Coating of Wire	Min.	90 g/m ²	104	g/m ²	

CHEMICAL ANALYSIS OF WIRE ROD

(%)

Heat No.	C	Si	Mn	P	S	Ni	Cr	Mo
SF72810	0.8482	0.2370	0.6540	0.0085	0.0062			

REMARKS

* NON-ROTATING

* Certificate No. BUS 2404736/1~3

"Manufactured in accordance with Quality Management System approved to IATF 16949 : 2016, ISO 9001 : 2015"



CS CO., LTD. / S. J. Jo
 QUALITY ASSURANCE
 Authorized Quality Assurance Personnel